

HONDA

WINCH

MOUNT KIT

Installation

Instructions

KIT NUMBER: 20-1120

Master Lock®



www.masterlockatwinch.com

Order: 866-835-0628

Phone: 712-338-2974

FAX: 800-245-7569


E-MAIL: masterlock@cyclecountry.com

ONE YEAR LIMITED WINCH MOUNT WARRANTY

For the period of one year from the purchase date Master Lock will replace for the original purchaser, free of charge, any part or parts, when found, upon examination by Master Lock, to be defective in material, workmanship, or both.

All transportation cost incurred by the purchaser in submitting the material to Master Lock for replacement under this warranty, must be borne by the purchaser. If Master Lock determines that the product must be returned to the factory for credit please call 1-866-835-0628 for an RMA number and shipping instructions.

The warranty does not apply to parts that have been damaged by accident, alteration, abuse, improper lubrication, normal wear, or other causes beyond Master Lock's control.

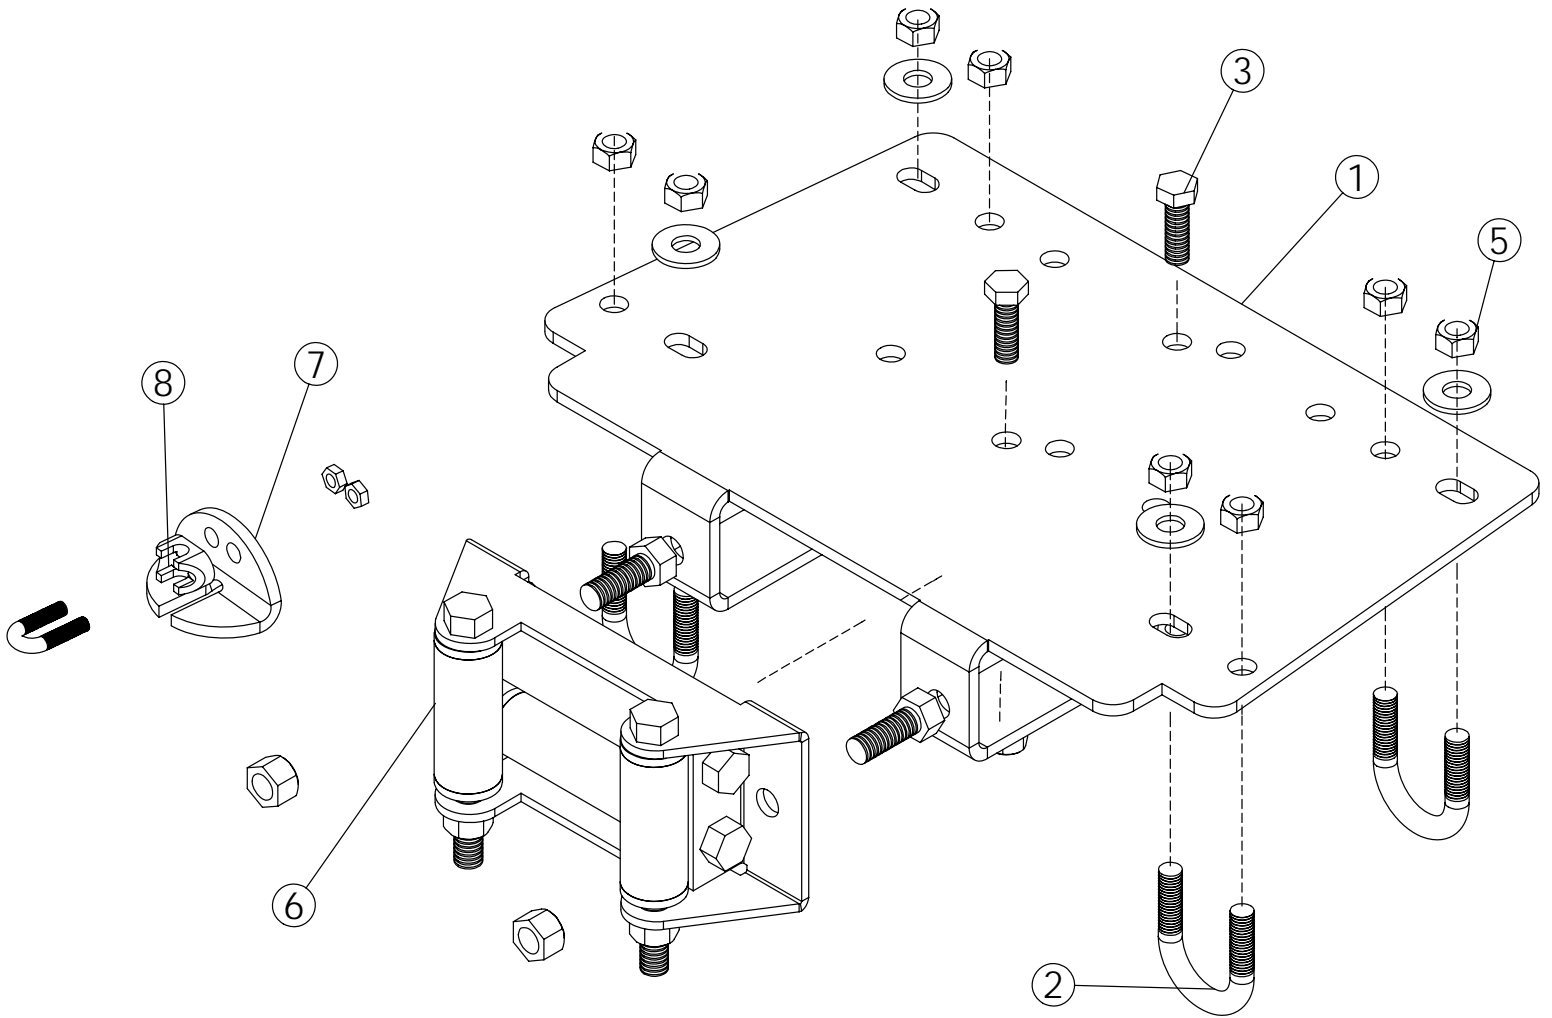



#20-1120 Parts List

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	CYC4323	Winch Mount
2	4	PUR1418	5/16" x 1" x 1-3/4" U-Bolt
3	2	PUR1155	5/16" x 1" Bolt
4	4	PUR1244	5/16" Flat Washer
5	10	PUR1275	5/16" Nylock Nut
6	1	11044	Roller Hawse Assembly
7	1	CYC0882	Cable Stop
8	1	PUR1606	3/16" Cable Clamp

Refer to the winch manual for winch mounting instructions.

**Some components of this kit may be already assembled. All directions referring to right and left are when the rider is sitting on the machine.

**WINCH MOUNT INSTALLATION INSTRUCTIONS
#20-1120**

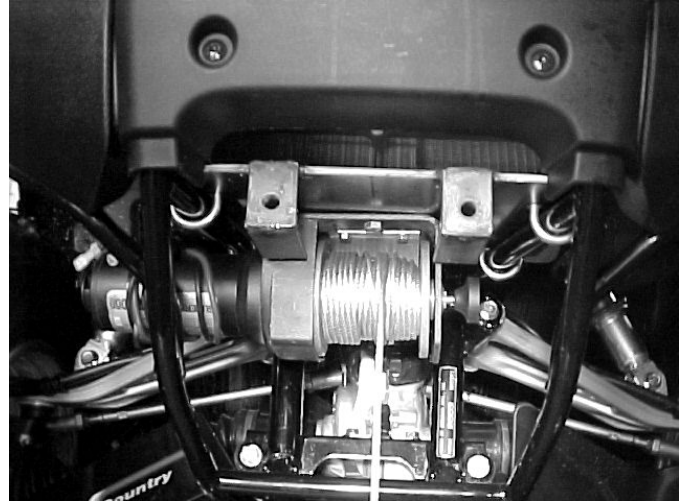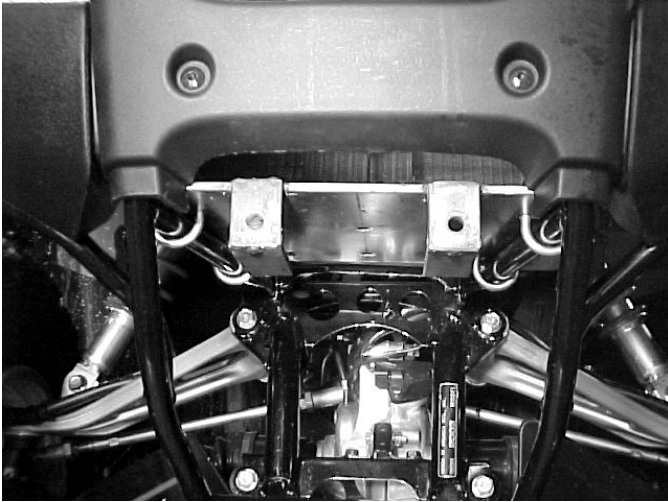

1. Remove front brush guard on the ATV.
2. Position the Winch Mount on top of the two top tubes on the brush guard and attach using four 5/16" x 1" x 1-3/4" U-Bolts. *See picture above.*
3. Using two 5/16" x 1-1/4" Bolts attach the Winch to the bottom side of the Winch Mount. The winch motor will be on the **RIGHT** side of the machine. *See picture above.*
4. Remove one of the long rollers and the two side rollers and feed the winch cable through the Roller Hawse. Reinstall the rollers and be sure rollers move freely.
5. Attach the Roller Hawse to the Winch Mount Plate using the 3/8" x 1" Bolts and Nylock Nuts provided. Tighten all hardware.
6. Reassemble the front brush guard on the ATV. And tighten all hardware.



When using the winch to raise and lower a blade a cable stop must be installed.

Carefully raise the blade until the top of the push tube's are no closer than 1" anywhere on the ATV. Place the Cable Stop onto the Winch Cable up against the Winch Hawse. Secure the Cable Stop to the Winch Cable using the Cable Clamp Assembly as shown in the pictures below.

